




Tendez et bloquez sans effort l'écoute de la voile d'ombrage.
Tighten and secure without effort the sheet of the shade sail.

TAQUET WINCH - CLEAT WINCH

Fixation sur mât ou sur mur Fixation on mast or wall

T-Winch No 2

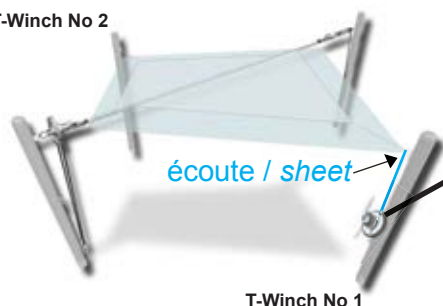


T-Winch No 1



Exemple fixation sur mât aluminium
Example of fixation on aluminum mast

Manipulation facile Easy operation

1 Attacher Attach 2 Tourner Turn

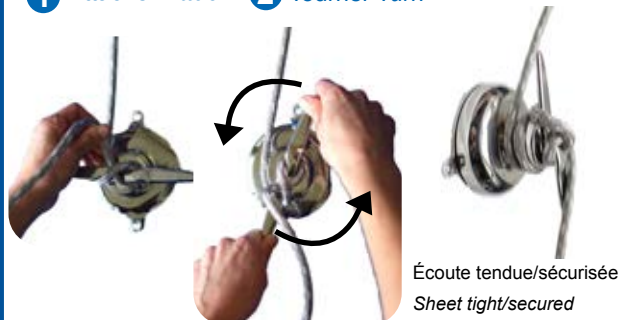

Écoute tendue/sécurisée
Sheet tight/secured



KEY FEATURES

- > 2-in-1 : load-supporting cleat fitted on a free wheel with unidirectional rotation (winch), patented system. Material : duplex.
- > Fixation on post (wood, stainless steel, aluminum) or wall (concrete, wood, stone)

USE

- > The T-winch cleat enables to optimize the final tensioning operation in the shade sail sheet (capacity of winding 45cm rope) with a safe attachment.
- > The sheet is simply tighten and easily attached/detached.



DESCRIPTION

- > 2-en-1 : fonction taquet (reprise de tension) combinée avec une roue libre à rotation unidirectionnelle (winch), système breveté. Matériel : duplex.
- > Fixation sur poteau (bois,inox, aluminium) ou mur (béton, bois, pierre)

UTILISATION

- > Le taquet T-winch permet d'optimiser la fin de mise sous tension de l'écoute d'une voile d'ombrage (capacité à emmagasiner 45cm de cordage) tout en sécurisant son attache.
- > L'écoute devient simple à tendre et facile à attacher/détacher.

TECHNICAL DATA / DONNÉES TECHNIQUES

MODEL MODÈLE	Part Number Référence	DIMENSIONS (mm)					Weight Poids (kg)	Longeur cordage emmagasiné Maximum rope length
		A	B	C	ø D	E		
T-Winch	43119008100	79,5	146	110	8-10	170	1,29	45cm

